


1			2			3			4			5			6			7		
PLUG COMPONENT			PLUG STRIP DIMENSION			END STRIP DIMENSION			CONNECTOR COMPONENT											
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	R.O.J	R.I.J	COLOR	COLOR	DESCRIPTION	Q'ty									
40P BLACK	IH-500(320 C14)	1	6 <sup>+1</sup> <sub>-0</sub>	19 ± 1	BLACK(L)	6 <sup>+1</sup> <sub>-0</sub>	15 ± 1	BLACK(L)	40P BLACK	IH-501(320 C13)	1									
Nickel-Plated	GEM 98672BS-1	3	6 <sup>+1</sup> <sub>-0</sub>	19 ± 1	WHITE(N)	6 <sup>+1</sup> <sub>-0</sub>	15 ± 1	WHITE(N)	True color	Assembly Body 111-001-005	1									
BLACK Outer Body	GEM 8671P	1	6 <sup>+1</sup> <sub>-0</sub>	19 ± 1	GREEN(E)	6 <sup>+1</sup> <sub>-0</sub>	15 ± 1	GREEN(E)												

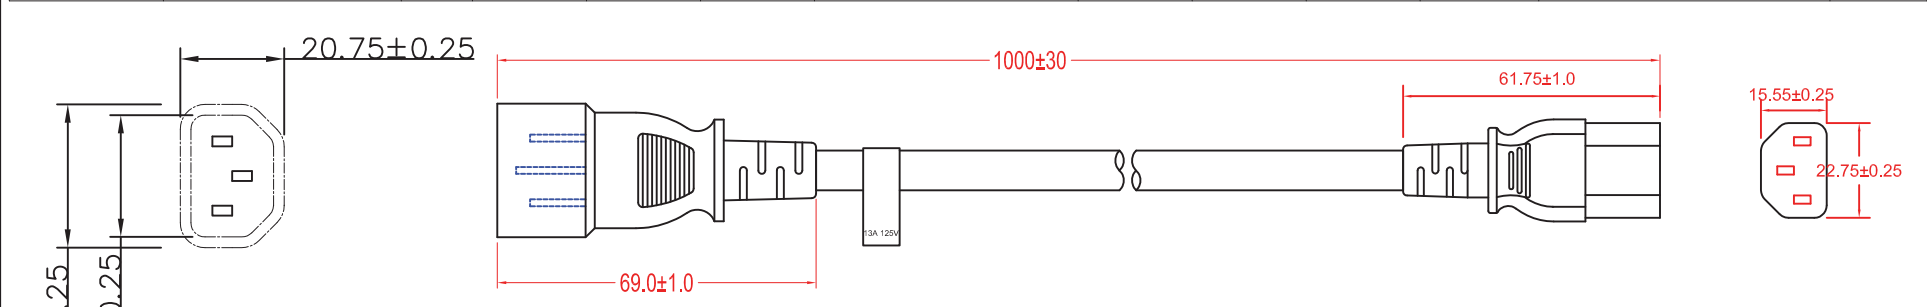


**Material:**


- SJT 3 x 16AWG(1.31mm<sup>2</sup>) VW-1, 60°C 300V
- Jacket Color: Black
- E - Green; L - Black; N - White

**Electrical:**

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (min.)
- Voltage: 500V DC / 1 minute

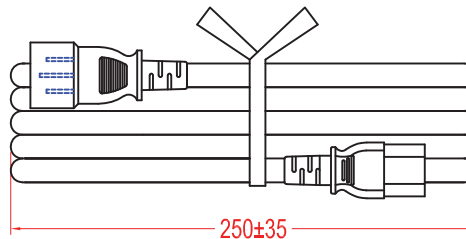

Hank Dimension

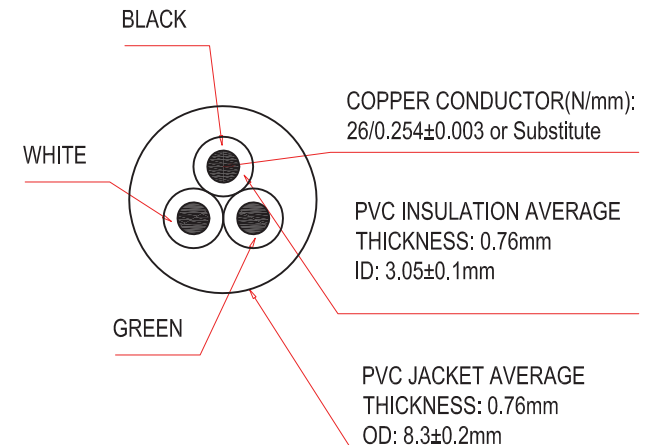

Wire Cross section

Unit: mm



Scale	Free				Date	Name	Title
TOLERANCE					Drawn	Wilson	Power Extension cord - SJT 60°C 16AWG M/F, Unshielded 1 Meter
X.	±X				Approved	Groll	ASSMANN WSW-No.
X.X	±X						AK500/16-OE-11-1
X.XX	±X						Drawing-No.
DIM	TOL						rev00
X.°	±X°						Sheet
X.X°	±X°						1/1
Angle	TOL	Id.	Modification	Date	Name	Replace	



1			2			3			4			5			6			7		
---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--