

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	500 STR/FLEX
Wire Type	Stranded Copper: Class G, H, I, K, M, Locomotive
Wire Strip Length	2-15/16 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	PINK
Panduit Die Index No. on Barrel	P99
Alternate Industry Die Index No. () on Barrel	(L99)

Dimensions are in inches





CERTIFIED



LISTED

Wire Connector

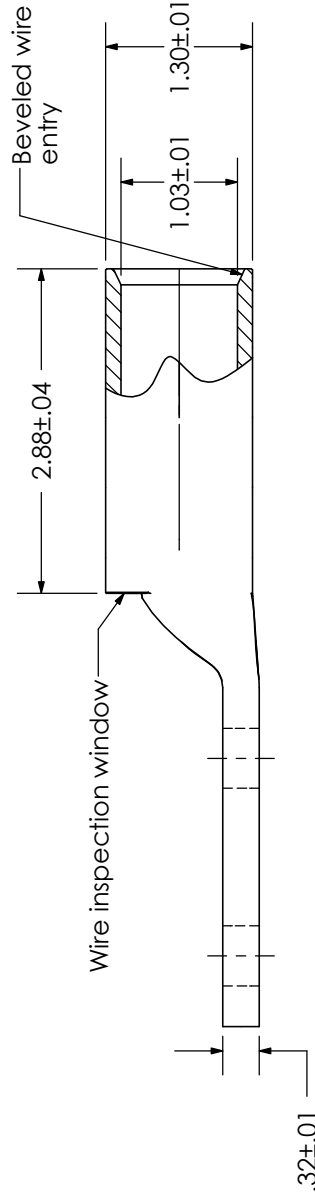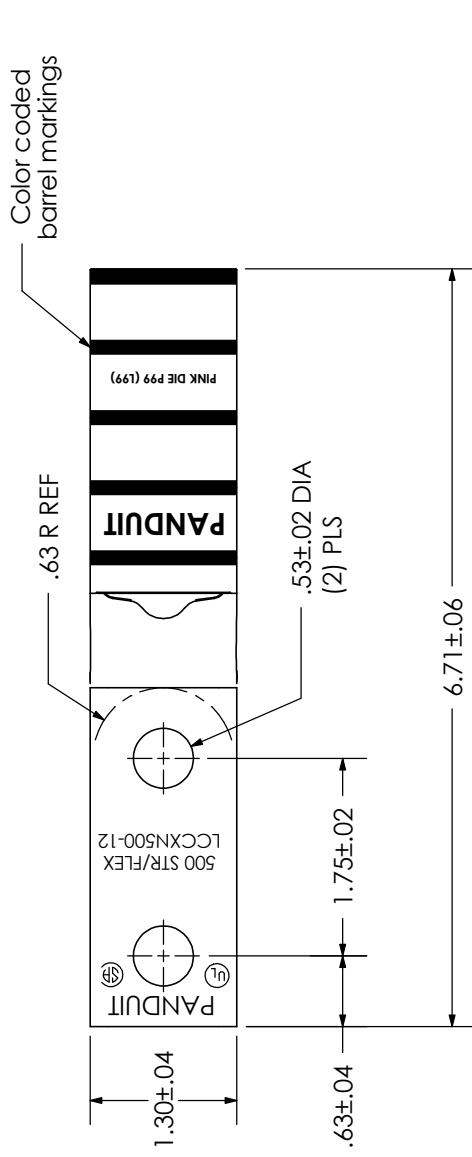

PANDUIT CORP. TINLEY PARK, ILLINOIS	
LCCXN500-12-6	
Copper Lug - Two-Hole, Narrow Tongue, Long Flex Barrel with Window	
REV	DATE
02	5/10
BY	JHNU JHNU
CHK	REMOVED WARRANTY & CUSTOMER SIGNATURE NOTE
DESCRIPTION	
ECN	
SCALE	N/A
DRAWING NO / CAD FILE	LCCXN500-12-CUST