

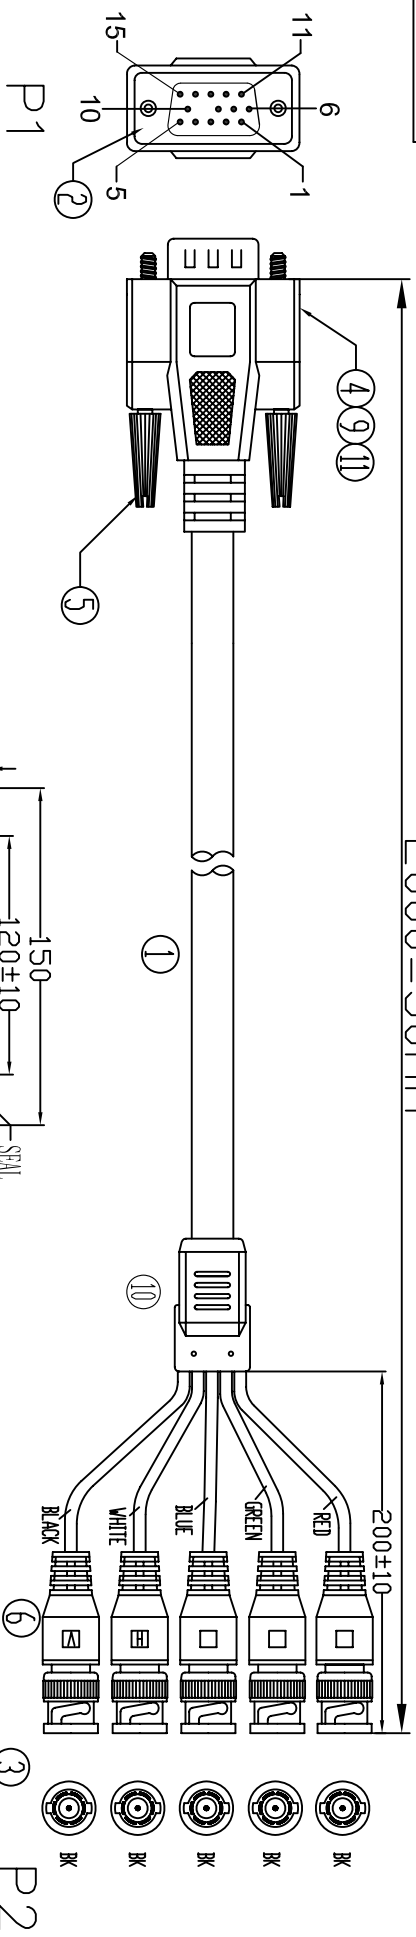


UNIT:mm

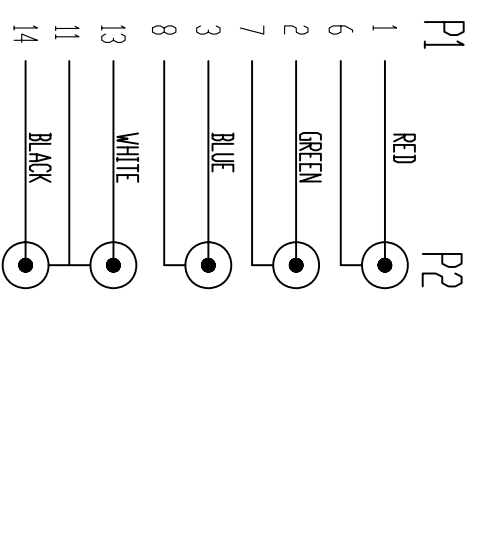

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:3 ohm max.
 3.Insulation Resistance:20M ohm min.
 4.Hi-Pot:300V DC/10ms

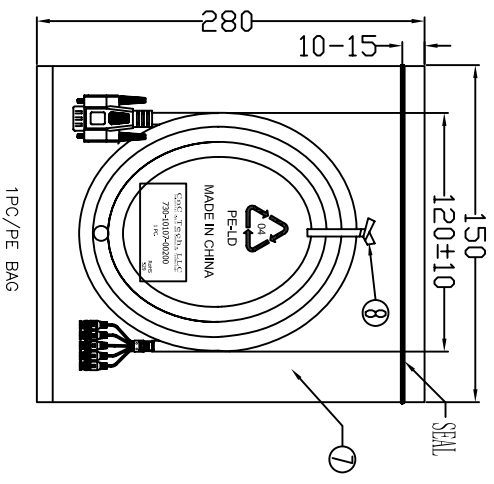

⑫	TUBE	1	HEAT SHRINK TUBE BLACK OD:5.5*L=5MM
⑪	TUBE	4	HEAT SHRINK TUBE BLACK OD:3.0*L=5MM
⑩	S/R	9g	BLACK 40P PVC (SR-24)
⑨	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*L=10MM
⑧	TIE	1	BLACK L=120mm
⑦	PE BAG	1	CLEAR SIZE:150*280*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC".
⑥	OUT JACKET	20g	BLACK PVC 40P (MM-13)
⑤	SCREW	2	SCREW:#4-40UNC D-E L32.5mm,NICKEL PLATED,INSULATION COLOR BLACK
④	OUT JACKET	22g	BLACK 40P PVC(MOULD NO:MM-113)
③	IN JACKET	4g	CLEAR LDPE(MOULD NO:MM-049)
②	CONN	5	BNC MALE MOLE TYPE NICKEL-PLATED CRIMP TYPE
①	CABLE	1	HDD15P MALE,PIN G/F-SHELL-NICKEL,INSULATION COLOR:BLACK. MISSING 9PIN SOLDER TYPE. U:2919 75 Ohm 28AWG(1C+S)*5COAX JACKET COLOL:BLACK OD:8.5*ID:15mm. L=2000±20mm.
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	730-10107-00200
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITEIN	A/0	PROJECTION	